


Cell Type UR18650W

Specifications

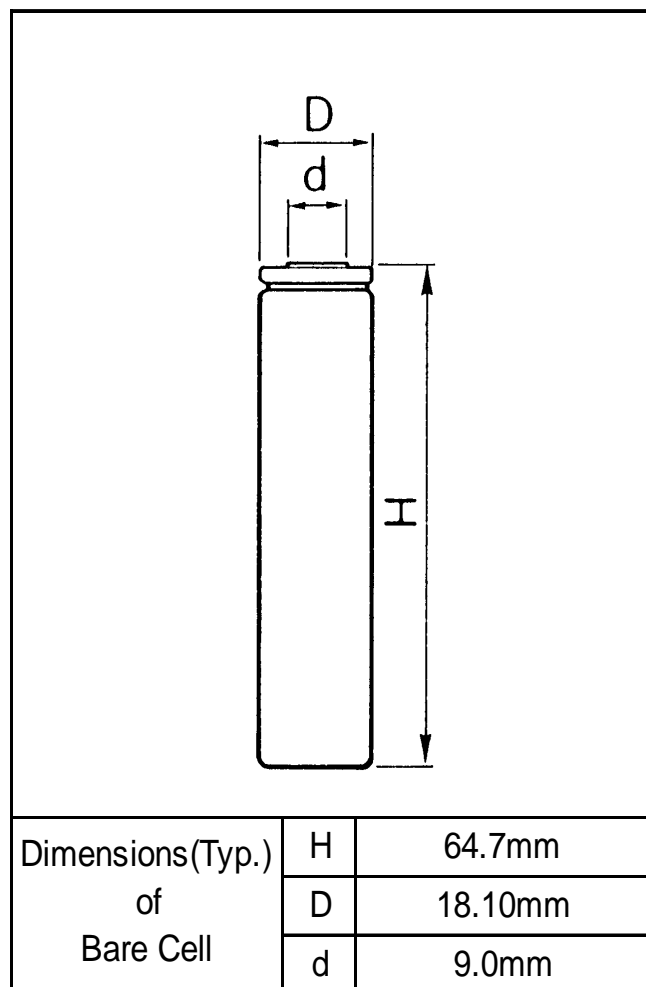

Discharged State after Assembling


Nominal Capacity		1500mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std.1500mA
Charging Time		2.5hrs.
Ambient Temperature	Charge	0~+40°C
	Discharge	-20~+60°C
	Storage	-20~+50°C
Weight (Max.)		45.4g
Dimensions (Max.)	(D)	18.10mm
	(H)	64.80mm
Volumetric Energy Density		333Wh/l
Gravimetric Energy Density		122Wh/kg

Maximum size without tube

Discharge Characteristics for UR18650W

Charge: CC-CV: 1.5A-4.20V(30mA cut) at 25°C

Discharge: CC: Variable Current (E.V.: 2.5V)

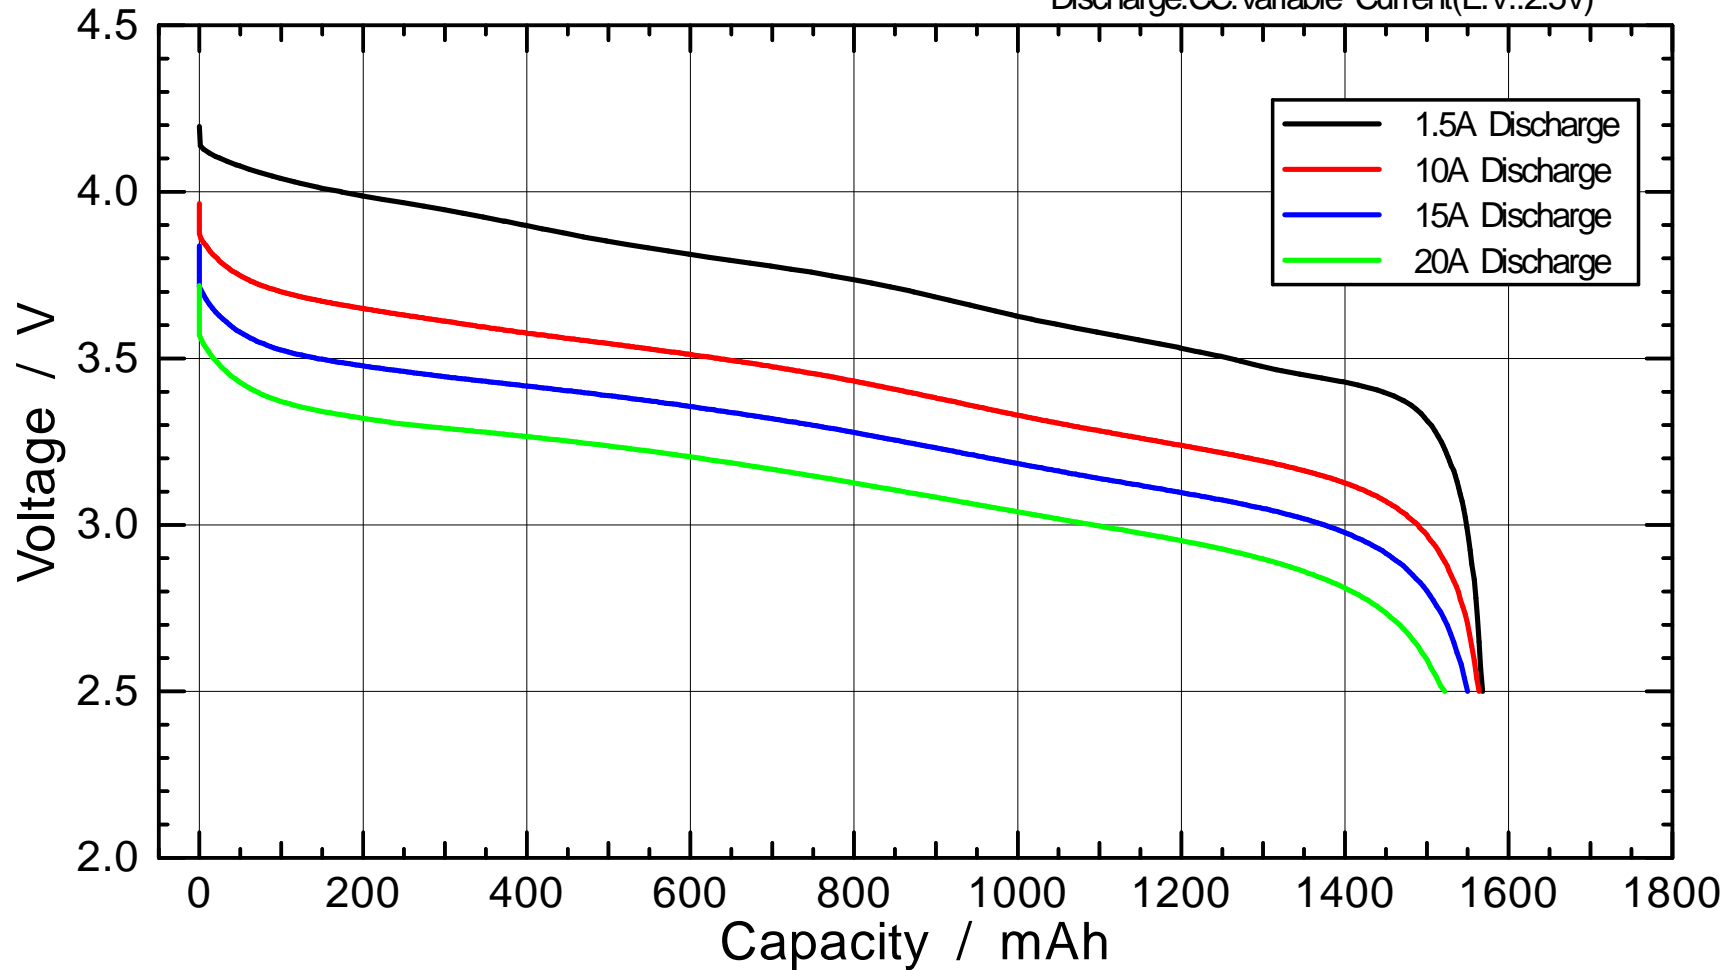

Discharge Characteristics for UR18650W

Charge: CC-CV: 1.5A-4.20V(30mA cut) at 25°C

Discharge: CC: 10A(E.V.: 2.5V)

